




Waterborne Finishing Systems for Parquet and Hardwood Floors

For information about compatibility of products with certain wood species or applications, please refer to the corresponding Technical information Bulletin.

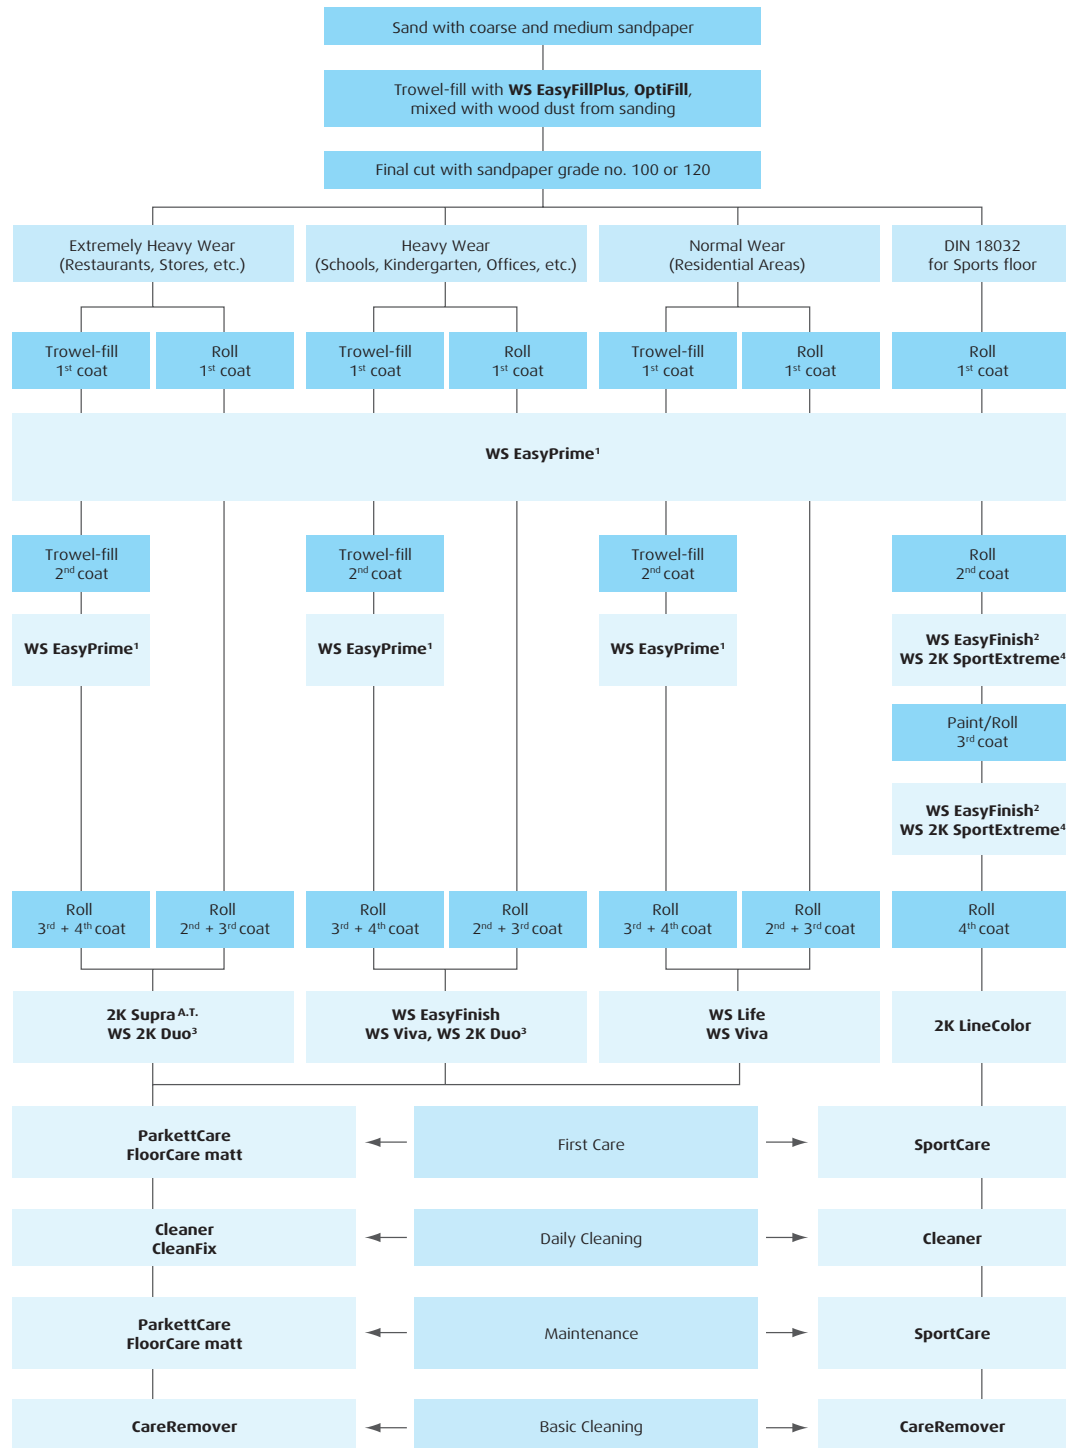

¹ WS EasyPrime: We recommend the use of this primer to reduce the tendency of side-bonding of waterborne finishes. The substitution of the Primer with a finish is possible, but can lead to streaking, discoloration and side-bonding.


² WS EasyFinish: Maintenance sports floors with LOBACARE® SportCare to retain the slip of resistance necessary for fulfilling the requirements of DIN 18032. Please note the special care instruction!

³ WS 2K Duo anti-slip has to be used if required by BGR 181. Please note the special care instruction!

⁴ WS 2K SportExtreme: Maintenance sports floors with LOBACARE® SportCare to retain the slip resistance necessary for fulfilling the requirements of DIN 18032. Please note the special care instruction!

Waterborne Finishing Systems

For information about compatibility of the products with certain wood species or applications, please refer to the corresponding Technical Information Bulletin.

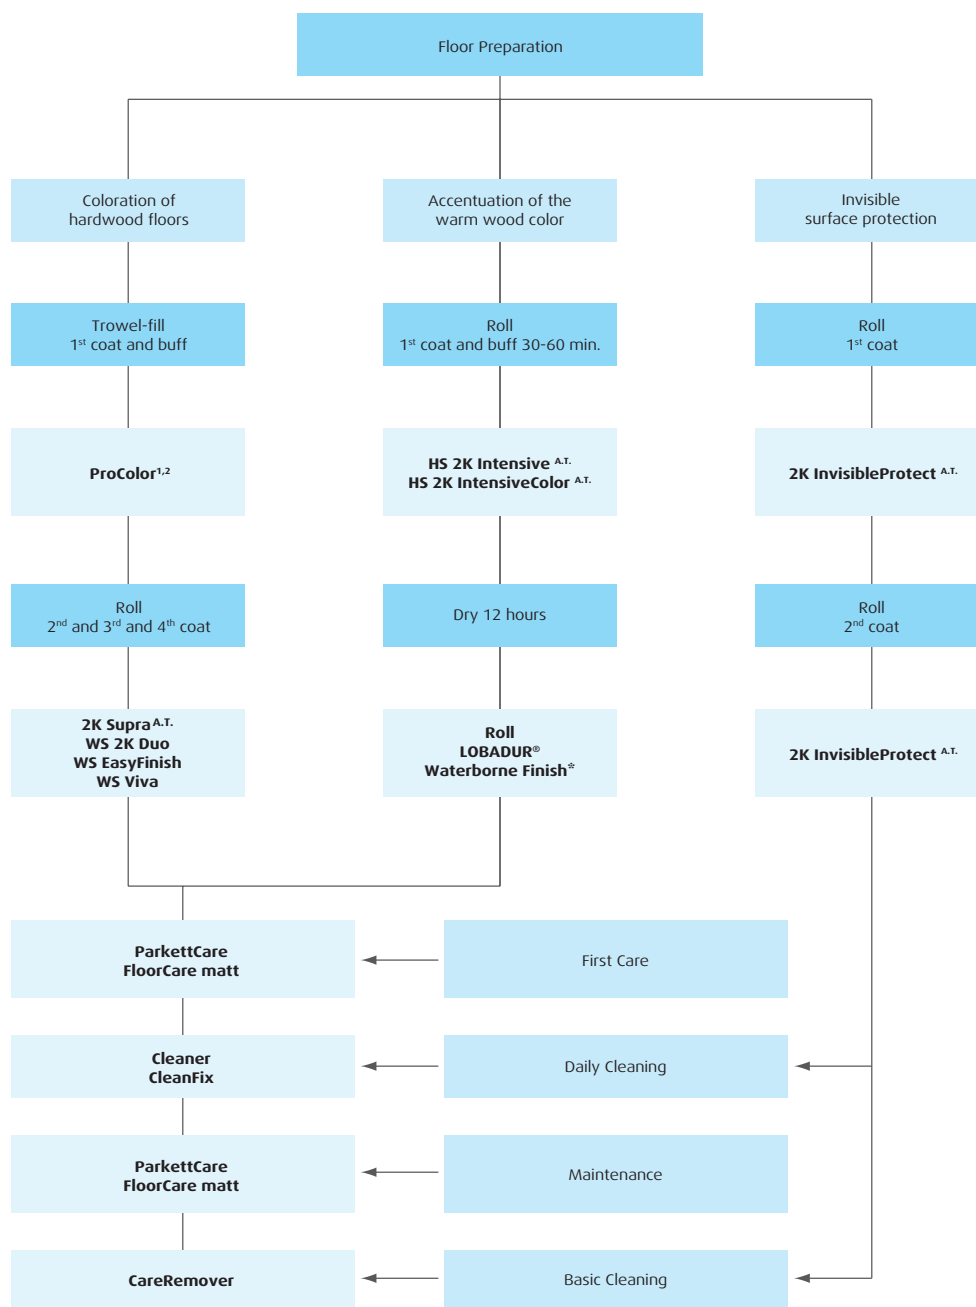

¹ LOBADUR® ProColor does not minimize the tendency for side-bonding of waterborne finishes.

² After application buff with a single disk machine and a beige pad.

* See Technical Information!